

ABSOLUTE ROTARY ENCODER PROFIBUS-DP



Main Features

- Compact and Heavy-Duty Industrial Model
- Certified: By Profibus Trade Org., CE
- Interface: Profibus-DP
- DPV2-Functionality
- Housing: 58 mm Ø
- Full or Hub Shaft: 6 or 10 mm Ø / 15 mm Ø
- max. 65536 Steps per Revolution (16 Bit)
- max. 16384 Revolutions (14 Bit)
- Code: Binary
- UL Listed

Mechanical Structure

- Aluminum Flange and Housing
- Stainless Steel Shaft
- Sealed Precision Ball Bearings
- Unbreakable and Durable Polycarbonate Code Disc

Programmable Parameters

- Direction of Rotation (Complement)
- Resolution per Revolution
- Total Resolution
- Preset Value
- Output of Velocity
- Time Base for Velocity
- Software Limit Switches
- Parameters for Isochronous Mode

Electrical Features

- Status Indication with LEDs
- 400 Million Write Cycles
- Temperature Insensitive IR-Opto-ASIC with Integrated Signal Conditioning
- Polarity Inversion Protection
- Over-Voltage-Peak Protection

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Technical Data

Electrical Data

Interface	Line-Driver According to RS 485, Galvanically Isolated by Opto-Couplers
Transmission Rate	max. 12 MBaud
Device Addressing	Adjustable by Rotary Switches in Connection Cap
Supply Voltage	10 - 30 V DC (Absolute Limits) *
Current Consumption	max. 230 mA with 10 V DC, max. 100 mA with 24 V DC
Power Consumption	max. 2.5 Watts
Step Frequency LSB	800 kHz
Accuracy of Division	$\pm \frac{1}{2}$ LSB (12 Bit), ± 2 LSB (16 Bit)
EMC	Emitted Interference: EN 61000-6-4
	Noise Immunity: EN 61000-6-2
Electrical Lifetime	$> 10^5$ h

* Supply voltage according to EN 50 178 (safety extra-low voltage)

Mechanical Data

Housing	Aluminum, Optional Stainless Steel			
Max. Shaft Load	Axial 40 N, Radial 110 N (9 lbs / 25 lbs)			
Moment of Inertia of Rotor	$\leq 30 \text{ gcm}^2$ (0.16 oz-in ²)			
Friction Torque	$\leq 3 \text{ Ncm}$ (4.2 oz-in) (without Shaft Sealing)			
RPM (Continuous Operation)	Single-Turn: max. 12,000 RPM			
	Multi-Turn: max. 6,000 RPM			
Shock (EN 60068-2-27)	$\leq 100 \text{ g}$ (Half Sine, 6 ms)			
Permanent Shock (EN 60028-2-29)	$\leq 10 \text{ g}$ (Half Sine, 16 ms)			
Vibration (EN 60068-2-6)	$\leq 10 \text{ g}$ (10 Hz ... 2,000 Hz)			
Weight (Standard Version)	Single-Turn: ~550 g (~1.2 lbs)			
	Multi-Turn: ~600 g (~1.3 lbs)			
Weight (Stainless Steel Version)	Single-Turn: ~1,100 g (~2.4 lbs)			
	Multi-Turn: ~1,200 g (~2.6 lbs)			
Flange	Synchro (S)		Clamp (C)	
Shaft Diameter	6 mm (~0.236 in)	10 mm (~0.394 in)	10 mm (~0.394 in)	15 mm (~0.591 in)
	10 mm (~0.394 in)	20 mm (~0.787 in)	20 mm (~0.787 in)	*

* Mating Shaft: min: 15 mm (~0.591 in) / max: 30 mm (~1.181 in)

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Minimum (Mechanical) Lifetime

Flange	Lifetime in 10 ⁸ Revolutions with F _a / F _r		
	40 N / 60 N 9 lbs / 13 lbs	40 N / 80 N 9 lbs / 18 lbs	40 N / 110 N 9 lbs / 25 lbs
C10 (Clamp Flange 10 x 20)	240	100	40
S10 (Synchro Flange 10 x 20)	210	90	30
S6 (Synchro Flange 6 x 10) without Shaft Sealing*	710	300	110

* S6 (Synchro Flange 6 x 10) with Shaft Sealing: max. 20 N Axial, 80 N Radial (5 lbs / 18 lbs)

Environmental Conditions

Operating Temperature	- 40 ... + 85 °C (- 40 ... + 185 °F)*
Storage Temperature	- 40 ... + 85 °C (- 40 ... + 185 °F)*
Humidity	98 % (No Condensation)
Protection Class (EN 60529)	Casing Side: IP 65
	Shaft Side: IP 64 (Optional with Shaft Sealing: IP66)

* Cable Exit: - 30 ... + 70 °C (- 22 ... + 158 °F) (Stationary), - 5 ... + 70 °C (23 ... 158 °F) (Flexing)


ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Interface


Installation

The rotary encoder is connected by two or three cables, depending on whether the power supply is integrated into the bus cable or connected separately. If the power supply is integrated into the bus cable one of the cable glands can be fitted with a plug. The cable glands are suitable for cable diameters from 6.5 up to 9 mm.

Termination resistors are integrated in the connection cap. These must be switched on if the encoder is connected at the end or the beginning of the bus.

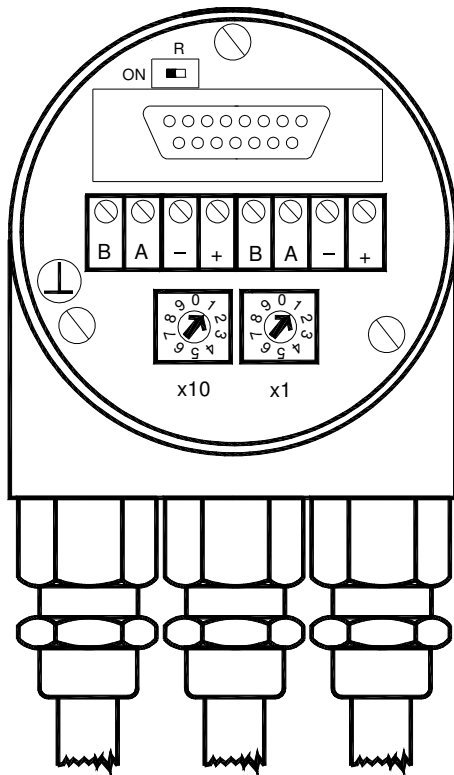

Connecting the data line and the power supply



Clamp	Description
B (Left)	Bus Line B (Bus In)
A (Left)	Bus Line A (Bus In)
-	0 V
+	10 – 30 V
B (Right)	Bus Line B (Bus Out)
A (Right)	Bus Line A (Bus Out)
-	0 V
+	10 – 30 V

The Profibus-DP device address is set by user-friendly rotary switches in the connection cap. Allowed addresses are between 1 and 99, each can only be used once. The connection cap can easily be opened for installation by removing the two cap screws.

The power supply has to be connected once (no matter which clamps). If the terminating resistor is switched on the outgoing bus lines are disconnected.

A GSD-file is necessary for installing the encoder. The GSD-file and the detailed user manual can be downloaded from our website (www.posita.com).

The connection cap is provided with two LEDs on the backside, which optically represent the device status. This can be very useful for installing and setting-up the encoder.

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Interface

Programmable Parameters

The Profibus-DP interface supports CLASS 1 and CLASS 2 functionality according to the encoder profile*. In addition to these functions the GSD-file supports further features, for example software limit switches. Further more, the following encoder parameters can be programmed directly via the Profibus-DP network without any extra device:

Counting Direction	This parameter counting direction defines whether the output code increases or decreases when the shaft rotates clockwise.
Resolution per Revolution	The parameter 'resolution per revolution' is used to program the desired number of steps per revolution. Each value between 1 and the physical resolution per revolution can be programmed.
Total Resolution	This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total physical resolution of the absolute rotary encoder.
Preset Value	The preset value is the desired position value, which should be reached at a certain physical position of the axis. The position value is set to the desired process value by the parameter preset.
Velocity	The implemented software can additionally deliver the current velocity. This value is transmitted in binary code, 16 Bit, in addition to the process value. It is possible to choose between four different units: steps per 10 ms, per 100 ms, per 1000 ms and revolutions per minute.
Software Limit Switches Function	Two software limit switches can be set. If the position value falls below the lower or exceeds the higher limit switch, a status bit in the process value is set.
Teach-In (Online Parameterization)	A special mode is available for commissioning phase of the device. This makes it possible to change parameters while the encoder is in data exchange mode. For continuous operation another mode is available in which the parameters are protected against unintentional changes.

* The Profibus-DP profile for encoder can be ordered from
Profibus Nutzerorganisation e.V.
Haid und Neu-Str. 7,
D-76131 Karlsruhe, Germany
with order-No. 3.062.


ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Mechanical Drawings (all dimensions in mm)

Synchro Flange (S)


available in 2 versions

Synchro Flange	d / mm	l / mm
Version S06	6 _{f6}	10
Version S10	10 _{h8}	20

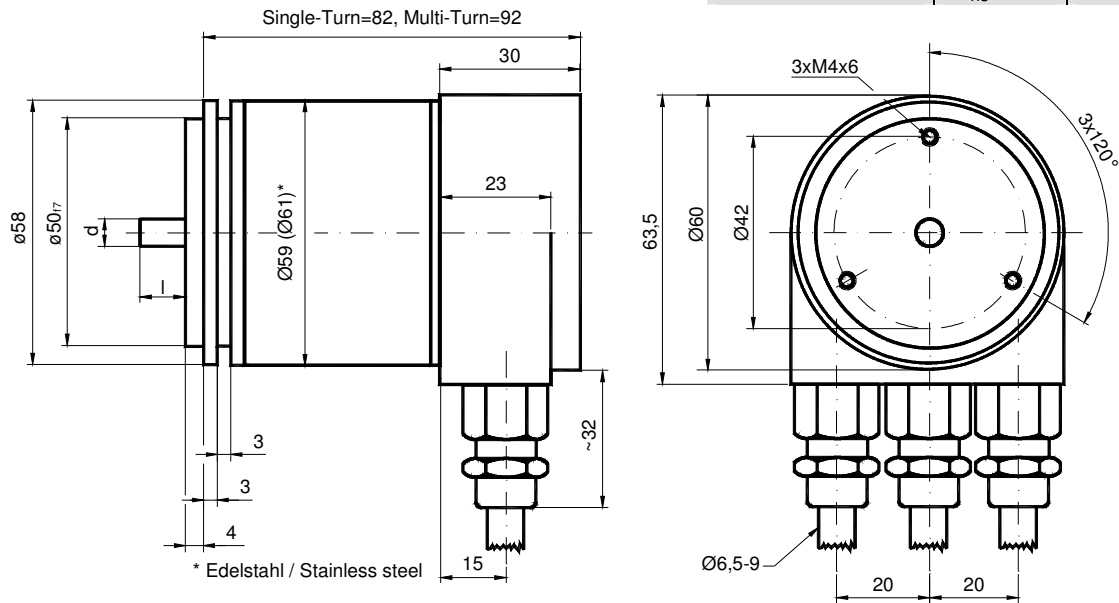

Schlüsselweite, wrench size=17


Clamp Flange (C)

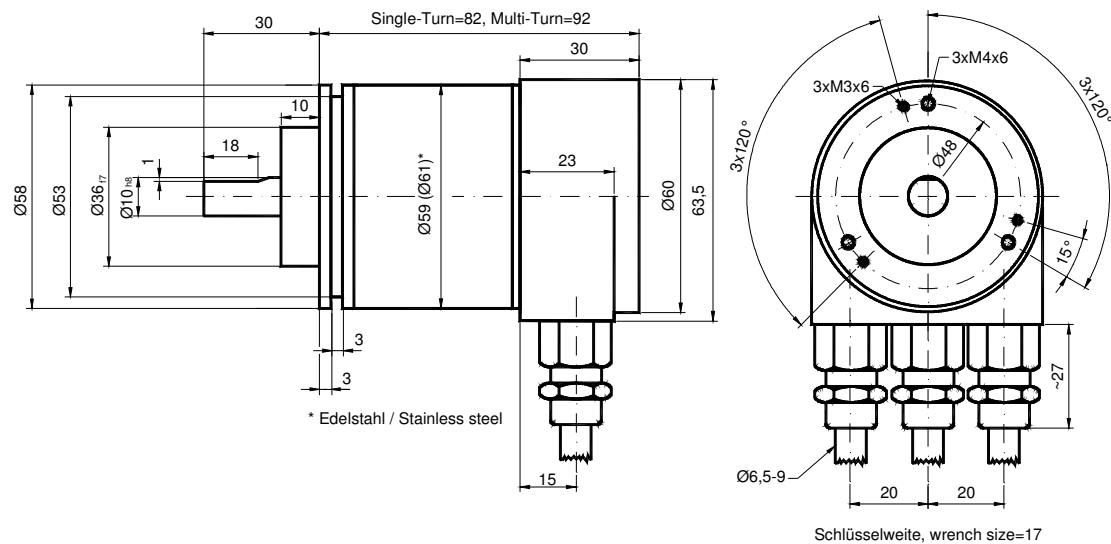

Schlüsselweite, wrench size=17

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Hub shaft (B)

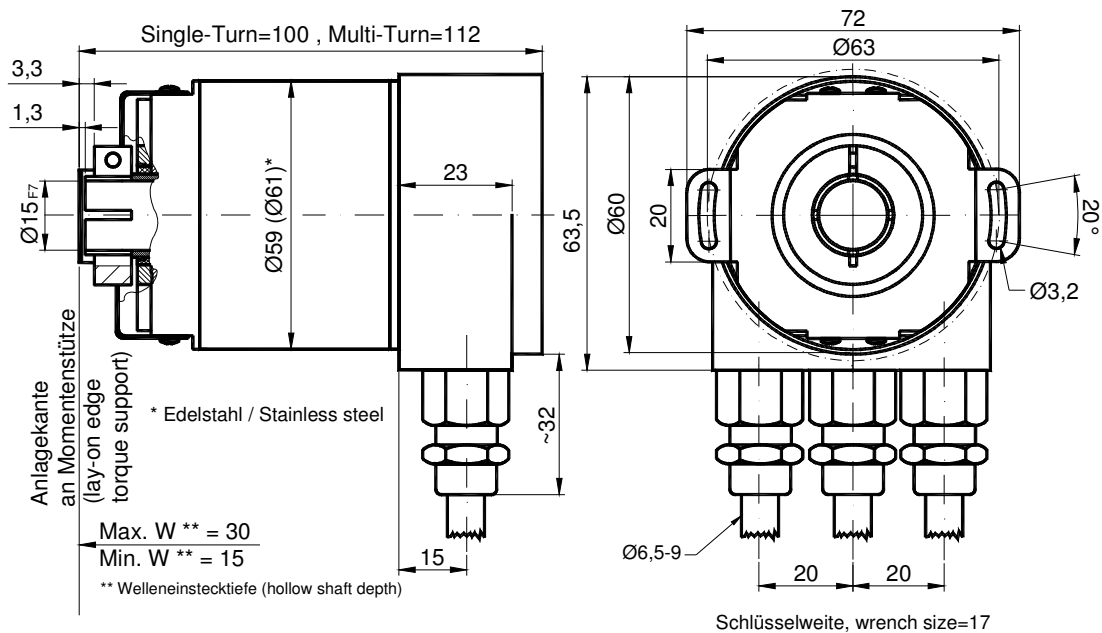

Mounting Instructions

The clamp ring may only be tightened if the shaft of the driving element is in the hub shaft.

The diameter of the hub shaft can be reduced to 12mm, 10 mm or 8 mm by using an adapter (this reducing adapter can be pushed into the hub shaft).

Allowed shaft movements of the drive element are listed in the table.

	Axial	Radial
Static	± 0.3 mm (~0.012 in)	± 0.5 mm (~0.020 in)
Dynamic	± 0.1 mm (~0.004 in)	± 0.2 mm (~0.008 in)

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Versions / Ordering description

Description	Type Key								
Optocode	OCD-	DP	B1	B -	---	---	---	-	0CC
Interface	Profibus	DP							
Version			B1						
Code	Binary			B					
	Single-Turn				00				
Revolutions (Bits)	Multi-Turn (4096 Revolutions)				12				
	Multi-Turn (16384 Revolutions)				14				
Steps per Revolution (Bits)	4096						12		
	8192						13		
	65536						16		
Flange / Shaft Diameter	Clamp Flange, Full Shaft, Ø 10 mm							C10	
	Synchro Flange, Full Shaft, Ø 6 mm							S06	
	Synchro Flange, Full Shaft, Ø 10 mm							S10	
	Hub Shaft, Ø 15 mm							B15	
Mechanical Options	Without							0	
	Shaft Sealing (IP66)							S	
	Stainless Steel Version *							V	
	Customized							C	
Connection	Connection Cap								0CC
	Has to be Ordered Separately – See Accessories								

Standard = bold, further models on request

All types UL-listed

* delivery time: on request

ABSOLUTE ROTARY ENCODER PROFIBUS-DP

Accessories and Documentation

Description		Type
Connection Cap	T-coupling-functionality with integrated address setting Standard	AH 58-B1DP-3PG
	Stainless steel configuration	AH 58-B1DP-3PG-VA
Connection Cap "2M20" - Special Version -	Same function as standard cap but only two cable glands for cable diameters from 9 up to 13 mm	AH 58-B1DP-2M20
Shaft Coupling **	Diameter: Ø 10 mm	GS 10
	Diameter: Ø 6 mm	GS 06
Clamp Disc **	4 pcs. / OCD	SP 15
Clamp Ring **	2 pcs. / OCD	SP H
Reducing Adapter *** (Hub Shaft)	15 mm to 12 mm (to ~0.472 in)	RR12
	15 mm to 10 mm (to ~0.394 in)	RR10
	15 mm to 8 mm (to ~0.315 in)	RR8
GSD-File *		
User Manual *	Installation / Configuration Manual for Profibus, English	UME-B1DP
User Manual *	Installation / Configuration Manual for Profibus, German	UMD-B1DP

* Note: All datasheets and manuals can be downloaded for free from our website www.posital.com

** not for hub shaft

*** only for hub shaft

We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.